



# Mussbaum

POWER LIFT HL 2.35 NT MB

3500 KG


FULLY HYDRAULIC, TWO-POST LIFT.

# **FASTEST**

LIFTING AND LOWERING TIMES
REDUCE COST OF WORKING PROCESS

MODERN NT TECHNOLOGY

LOW-MAINTENANCE

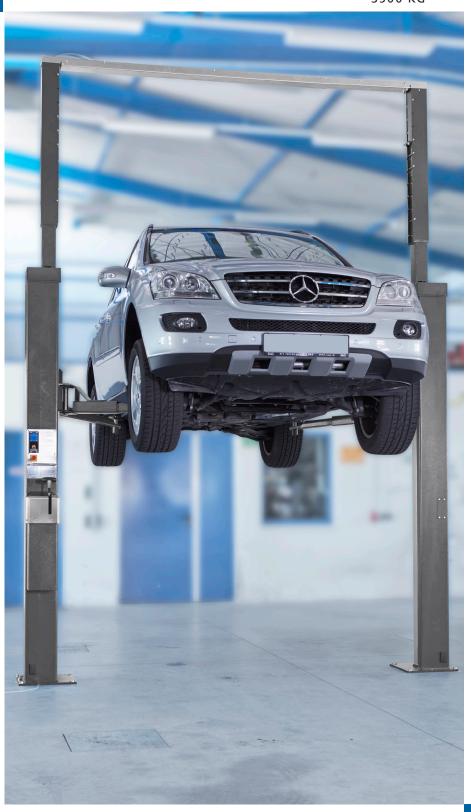



# POWER LIFT HL NT

HYDRAULIC TWO-POST LIFTS, TESTED AND APPROVED BY MERCEDES-BENZ




Diagram of NT technology

## OPERATIONALLY RELIABLE

- NUSSBAUM NT technology: double master slave system
- Crossed-cylinder master slave system provides a leveled lifting and lowering without the need for synchronization cables
- Load is secured at any working height without a mechanical ratchet

Ease of use and smooth movement FAST, QUIET, POWERFUL.

## FAST LIFTING AND LOWERING TIMES

- 20 sec of lifing and 14 sec lowering (HL 2.30 NT)
- Double cylinders pull load from both sides constant and

# PROGRESSIVE CONTROL

- Lifting and lowering through ergonomic control lever
- Smooth and adjustable lowering possible

#### CURRENTLESS LOWERING - HIGH ENERGY EFFICIENCY

## COST SAVINGS

Due to the fast lifting and lowering times, the time saving and cost saving are generated in the working process.

- Compare to the conventional lift, the POWER LIFT HL 2.35 NT MB saves approx. 50 s per one working process (1 x lifting / 1 x lowering). This means, by 6 working processes - 1 WU will be saved.
- Calculated only with 3 lifting and lowering processes per day, here you can already save 0,5 labour value\* per day.
- By 210 working days per year, which corresponds 110 labour value\* per working space.
  - \*Labour value each hour contains 12 labour values, which each labour value contains 5 minutes

# POWER LIFT HL 2.35 NT MB - SCOPE OF DELIVERY




Tested and homologated by Mercedes-Benz



Height adapter for G model without running-board (4 units)





Height adapter for G model with running-board (4 units) Art.-Nr. 232SL08610



Document holder on column Art.-Nr. 975075



Magnetic basket for wheel nuts (2 units) Art.-Nr. 232SL29312SET



# FLEXIBLE CONSTRUCTION HEIGHT AND **DISTANCE BETWEEN COLUMNS**

- Standard construction height of 4040mm
- Adjustable construction height in 100mm steps with riser pipe extension from 4109mm up to 4909mm
- Adjustable top connection Ideal columns positioning and minimum space required with an optimal drivethrough width.



HOT GALVANIZED AND POWDER-COATED Special coating for optimum corrosion protection, tested by the Fraunhofer institute



# ASYMMETRIC LIFTING ARMS CONSTRUCTION



Optimal door clearance Arrangement of lifting arms minimum of lowest pick-up is always asymmetric



Telescopic lifting arms with point



Automatic adjustment of lifting arm with gearing, manual releasing possible

## **OPTION: ENERGY-SET**

- Electricity and air pressure at the working space
- 220 V power socket and air supply, integrated in the column
- Integrated CE Stop with acoustic warning signal



## **OPTIONAL ACCESSORIES**



Lashing strap (2 units) Art.-Nr. 975086



Height adapter 50mm (4 units) Art.-Nr. 232HEL48083SET



Height adapter 100mm (4 units) Art.-Nr. 232HEL48087SET



Drive-on tables (4 units) Art.-Nr. 235HL05130SET
































# POWER LIFT HL 2.35 NT MB

HYDRAULIC TWO-POST LIFTS, TESTED AND APPROVED BY MERCEDES-BENZ

## TECHNICAL DATA

Lifting/ lowering times (sec) Lifting height (mm) Lowest lifting point (mm) Clearance height (mm) Total height (mm) Total height with riser pipe extension (mm)	3500
Lifting height (mm)  Lowest lifting point (mm)  Clearance height (mm)  Total height (mm)  Total height with riser pipe extension (mm)  Total width (mm)	22 / 4 4
Lowest lifting point (mm)  Clearance height (mm)  Total height (mm)  Total height with riser pipe extension (mm)  Total width (mm)	23 / 14
Clearance height (mm) Total height with riser pipe extension (mm) Total width (mm)	1995
Total height (mm)  Total height with riser pipe extension (mm)  Total width (mm)	95–140
Total height with riser pipe extension (mm) Total width (mm)	3957
riser pipe extension (mm) Total width (mm)	4040
	4109–4909
Recommended setting width (mm)	3230
	3230
Drive-through width (mm)	2400
Distance between columns (mm)	2646
Long arms extraction (mm)	940–1495
Short arms extraction (mm)	505–823
Power supply (V/Hz/A)	400/50/16
Motor (kW)	3
Necessary ceiling height (mm)	min. 4182
Data sheet	7482-1_MB
Article number	HI NT235.0000100MB

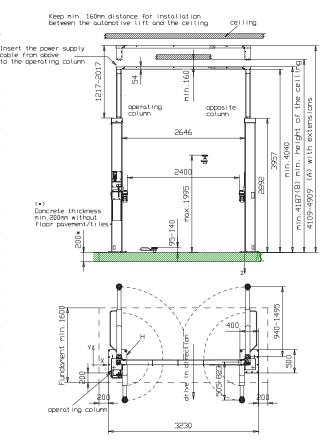

# MADE IN GERMANY

# muselbeum













The family business from Kehl am Rhein with over 1.200 employees and 120 trainees produces its products exclusively in Germany utilizing a vertical range of manufacturing using the latest technological processes and machines with complete quality control, making NUSSBAUM the leader for automotive lifts in Germany.

