



# **VAS 791 001 Scissor Lift**


*Customized for Volkswagen, Audi, Porsche, SEAT, Škoda and Bentley vehicles*

**UPDATED**



# RX Scissor Lift (VAS 791 001; ASE 791 001 80 000)

Large capacity  
with a small footprint

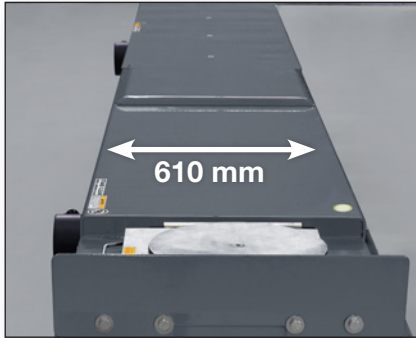


**STANDARD**

## Wide runways

- ✓ 610 mm (24 in.) runways accept wide vehicles

**OPTIONAL**

## Stainless steel turnplates

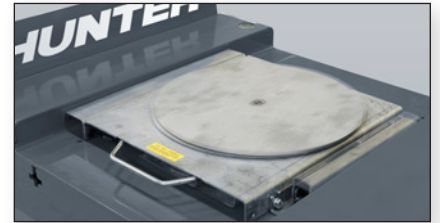

- ✓ Maximum corrosion resistance for long life
- ✓ Optional PowerSlide® turnplates (shown) lock/unlock automatically (VAS 791 001/1; ASE 791 002 80 A00)

**STANDARD**

## Extended wheel stops



- ✓ Provides additional space when using conventional sensors

**STANDARD**

## Integrated air line



- ✓ Convenient air source for tools at front and rear

**PATENTED**

## Sensor feedback system\*



- ✓ Sensors keep runway level
- ✓ Safely stops if obstructed

**STANDARD**

## Velocity safety fuses




- ✓ Instantaneous shutdown in event of hydraulic failure

\* Shown with protective cover removed



EXCLUSIVE

### Best-in-class drive-on height

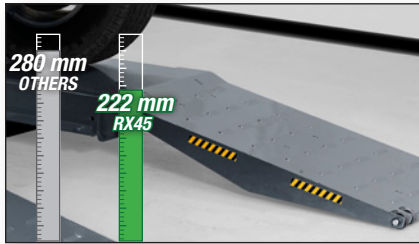

- ✓ Minimize clearance issues

EXCLUSIVE

### Louvered ramps



- ✓ Prevent wheel spin in wet conditions
- ✓ More effective than diamond tread or abrasive strips

PATENTED

### Control panel



- ✓ Complete operation from the console
- ✓ Optional PowerSlide® Inflation Station and Fully Integrated Alignment (FIA) control



*RX45KLIS-435VE shown with optional light kit, Swing Air Jacks, and front templates*

STANDARD

### Safety locks



- ✓ Precision-fit teeth lock runways at 16 level height positions

EXCLUSIVE

### Movable work steps



- ✓ 10 secure positions
- ✓ Lightweight design

PATENTED

OPTIONAL

### Inflation Station



- ✓ Automatically fills or bleeds each tire
- ✓ No dangling air lines

# Exclusive features, enhanced capabilities

EXCLUSIVE

## Fast descent speed

- ✓ 50% faster lowering times
- ✓ Ensures a soft landing by automatically slowing the last several inches

FAST  
Descent 0:25



0:50 Others




EXCLUSIVE OPTIONAL

## Flush-mount installation

- ✓ Accommodate lowered vehicles or expensive spoilers
- ✓ Ideal for “showcase” shops
- ✓ Drive-thru capability

Add F to model number (RX45KLFISVAGE)

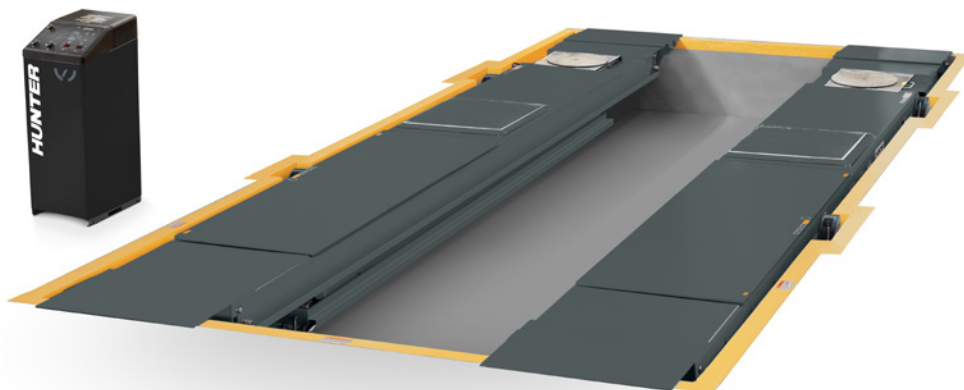

**EXCLUSIVE**    **OPTIONAL**

## AlignLights system

- ✓ Bright and efficient LED light source underneath the vehicle
- ✓ Automatically turns on when the lift is raised and turns off when the lift is lowered to the floor
- ✓ AlignLights is an ALI-listed accessory

**20-3438-1** — *AlignLights system*




## Standard equipment

- ✓ Flush-mounted, full-floating slipplates (PowerSlide® slipplates on PS and IS models)
- ✓ Two movable work steps (not included with flush-mount installations)
- ✓ Louvered ramps with built-in wheel stops
- ✓ Extended front wheel stops
- ✓ Two wheel chocks
- ✓ Built-in air line kit
- ✓ Floor leveling kit

**OPTIONAL**

## Extension kits

### Approach ramp extensions




**305 mm (12 in.) kit**  
**20-3112-1**

**432 mm (17 in.) kit**  
**20-3113-1**



**1016 mm (40 in.) kit\***  
**20-2169-1**

**1270 mm (50 in.) kit\***  
**20-2189-1**

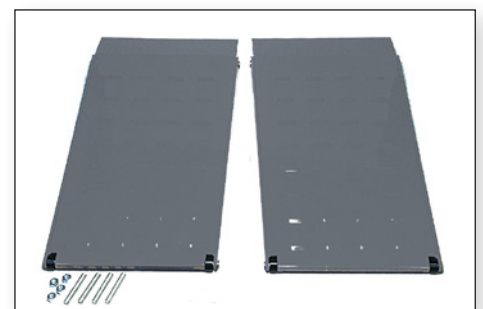

### Drive-thru conversion kits\*

**52 in. kit – 20-2498-1**

For camera sensors

**63 in. kit – 20-2501-1**

For conventional sensors

\* Quick-release pins included.




# Hunter offers two fully integrated options to enhance productivity



## **FIA** Fully Integrated Alignment

FIA allows WinAlign® aligners to control the lift features for ultimate productivity. Two patented designs offer greater flexibility and time-saving capabilities.

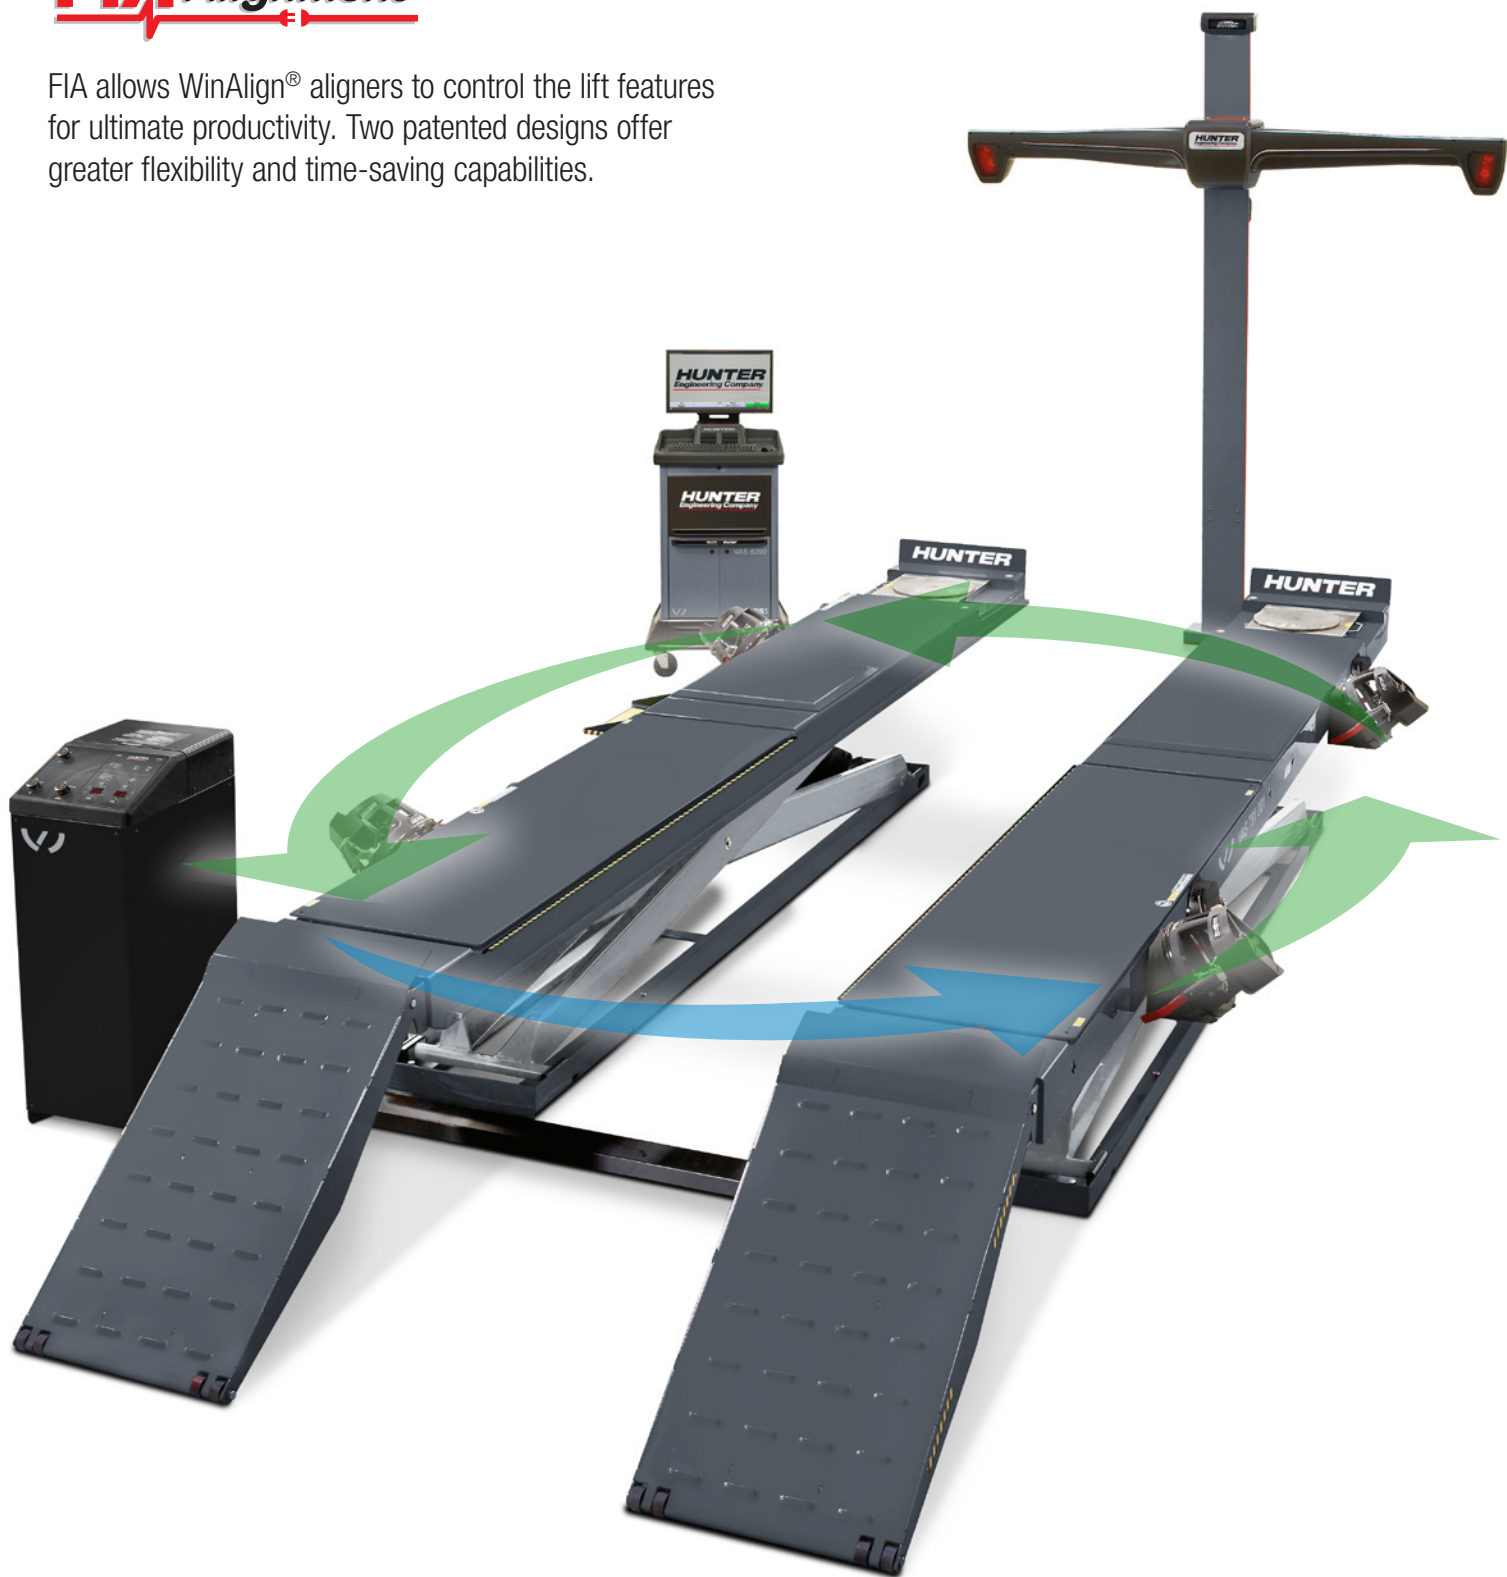

*Shown with optional aligner console, sensors, Swing Air Jacks, front turnplates, target support brackets, and lights*




PATENTED

## PowerSlide® edition

- ✓ Locks slipplates and turnplates with the touch of a button or automatically through an FIA-equipped aligner\*
- ✓ No more struggles with lock pins
- ✓ Avoid wear and tear and extend the life of your turnplates



OPTIONAL

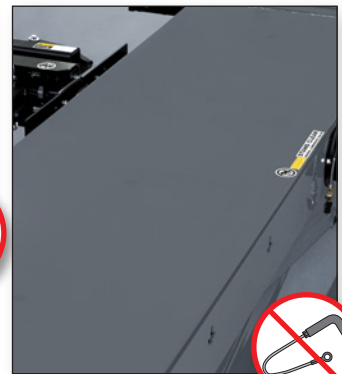


STANDARD



### Minimize trips around the car

- 1 Mount targets
- 2 Make adjustments
- 3 Remove targets
- 4 Jack vehicle and compensate sensors
- 5 Lower leveling legs (if equipped)
- 6 Remove slipplate and turnplate pins
- 7 Replace slipplate and turnplate pins
- 8 Raise leveling legs (if equipped)


### Yesterday's Technology

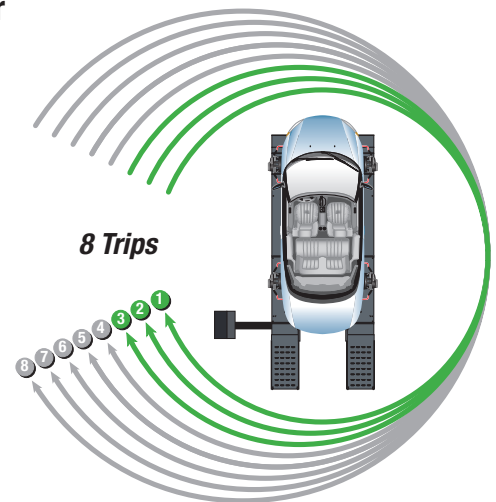

PATENTED

## Inflation Station edition

- ✓ Includes PowerSlide® slipplates and turnplates
- ✓ Automatically inflate all four tires simultaneously
- ✓ Record starting and final pressure\*
- ✓ Hose recoils to keep work area clear

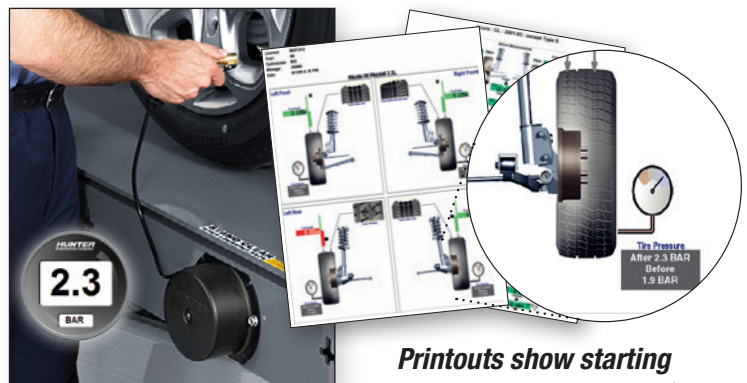

**Printouts show starting and final tire pressures.\***

\* Requires FIA equipped aligner with WinAlign® 10.x software or greater

# Specifications

<b>Max. vehicle weight</b>	4536 kg (10000 lbs.)
<b>Max. wheelbase</b>	<b>surface/flush</b>
General service	4673/4572 mm (184/180 in.)
Two-wheel alignment	4547/4445 mm (179/175 in.)
Four-wheel alignment	4013 mm (158 in.)
<b>Min. four-wheel alignment</b>	2235 mm (88 in.)
<b>Lowered height</b>	222 mm (8.75 in.)
<b>Max. lifting height</b>	1829 mm (72 in.)
<b>Alignment height</b>	All lock positions
<b>Runway width</b>	610 mm (24 in.)
<b>Tread width</b>	
Min. inside	1016 mm (40 in.)
Max. outside	2235 mm (88 in.)
<b>Air pressure</b>	6.2-10.3 bar (90-150 psi)
<b>Speed</b>	55 seconds (raise), 25 seconds (descent)

## Models

<b>RX45KIS-435VE</b>	Surface-mounted lift with Inflation Station and PowerSlide® rear slipplates (230/380/400V, 3Ph, 50Hz)
<b>RX45KFIS-435VE</b>	Flush-mounted lift with Inflation Station and PowerSlide® rear slipplates (230/380/400V, 3Ph, 50Hz)
<b>RX45KPS-435VE</b>	Surface-mounted lift with PowerSlide® rear slipplates (230/380/400V, 3Ph, 50Hz)
<b>RX45KFPS-435VE</b>	Flush-mounted lift with PowerSlide® rear slipplates (230/380/400V, 3Ph, 50Hz)
<b>RX45KIS-215VE</b>	Surface-mounted lift with Inflation Station and PowerSlide® rear slipplates (230V, 1Ph, 50Hz)
<b>RX45KFIS-215VE</b>	Flush-mounted lift with Inflation Station and PowerSlide® rear slipplates (230V, 1Ph, 50Hz)
<b>RX45KPS-215VE</b>	Surface-mounted lift with PowerSlide® rear slipplates (230V, 1Ph, 50Hz)
<b>RX45KFPS-215VE</b>	Flush-mounted lift with PowerSlide® rear slipplates (230V, 1Ph, 50Hz)


Because of continuing technological advances, specifications, models and options are subject to change without notice.

PowerSlide and WinAlign are registered trademarks of Hunter Engineering Company. The PowerSlide logo is a trademark of Hunter Engineering Company.

1018BH

Copyright © 2018, Hunter Engineering Company

## RX45K Plan View

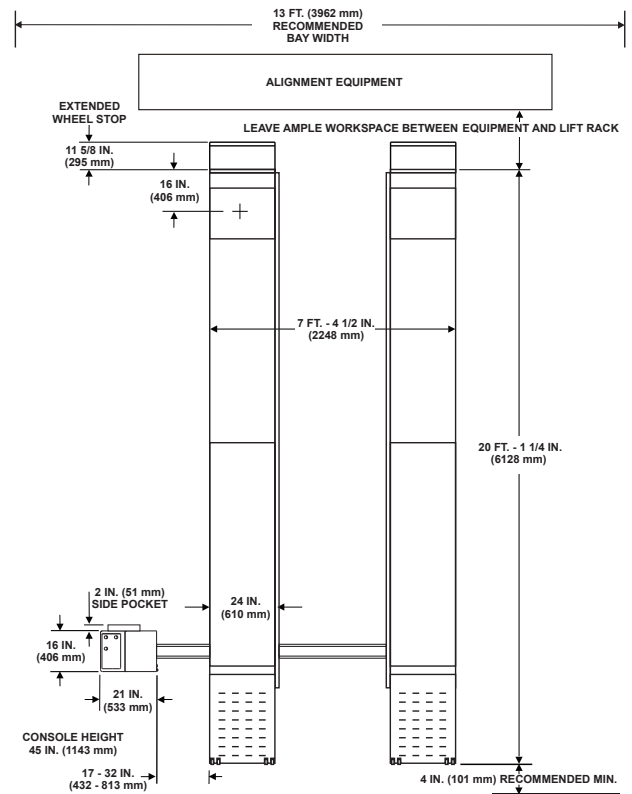

See your local Hunter Distributor for details on site requirement.

## Standard equipment

- ✓ Flush-mounted, full-floating slipplates (PowerSlide® slipplates on PS and IS models)
- ✓ Two movable work steps (not included with flush-mount installations)
- ✓ Louvered ramps with built-in wheel stops
- ✓ Extended front wheel stops
- ✓ Two wheel chocks
- ✓ Built-in air line kit
- ✓ Floor leveling kit

**HUNTER**  
Engineering Company

[www.hunter.com](http://www.hunter.com)

11250 Hunter Drive, Bridgeton, MO 63044, USA  
Tel: +1-314-731-3020, Fax: +1-314-731-0132  
Email: [international@hunter.com](mailto:international@hunter.com)

Form 6983-TE-05, 10/18  
Supersedes form 6983-TE-05, 05/15