



ELECTROMECHANICAL 2-POST LIFT

# SMART LIFT

***THE SMART ORIGINAL***



## THE ORIGINAL NUSSBAUM LIFT

- ✓ 5 years warranty on spindle and spindle-nut
- ✓ Flexible in height: Ideal for low ceiling workshops
- ✓ Asymmetric lifting arms and carriage for optimal door clearance
- ✓ Small footprint - Saves space

**3000 KG | 3500 KG | 4000 KG**

ELECTROMECHANICAL 2-POST LIFT

## SMART LIFT

### Sturdy, reliable and ready

The SMART LIFT is THE classic NUSSBAUM lift: it is the result of 40 years experience in the manufacturing of lifts. Featuring a tried and tested design, the SMART LIFT comes with a 5 year warranty on spindle and spindle-nut. More than 100,000 units are installed worldwide.

#### SAFE

- ✓ Automatic locking of the arms
- ✓ Safety nut under the carrying nut
- ✓ Optical control of the wear out of the carrying nut

#### LONG LASTING

- ✓ 5 years warranty on spindle and spindle-nut
- ✓ Low wear Nylatron-nut guarantees a quiet operation
- ✓ Resistant and almost wear-free Poly-V belt

Minimum  
of only 2

The data and ele  
that connect the  
can be installed  
columns or

#### SMART LIFT: THE ONE LIFT YOU NEED



Wide opening of the vehicle's front doors




3 stage lifting arm



Mini Max lifting arms : easy and convenient to lift off-road vehicles as well as low clearance vehicles



SC (Sports car) made of solid wide sports car

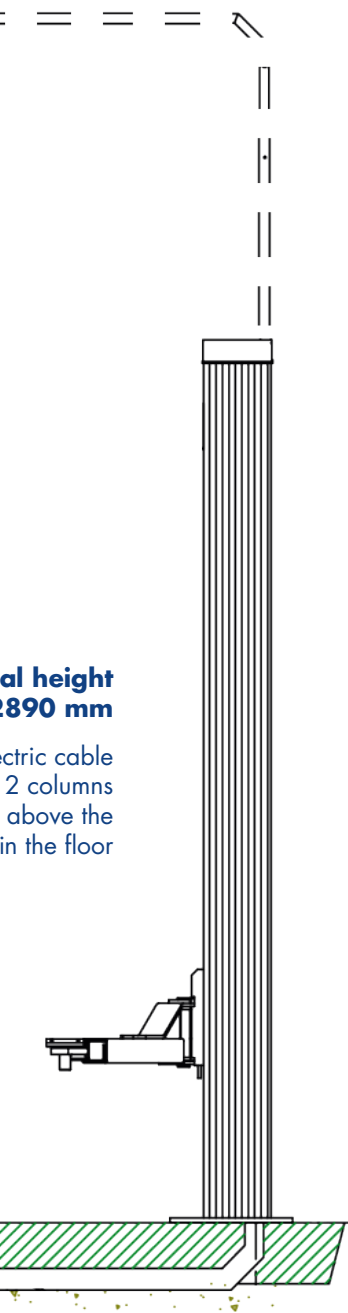

al height  
890 mm

electric cable  
2 columns  
above the  
in the floor

## Lifting arm versions available

- For SMART LIFT 3 and 3,5 tons

### DT (3 STAGE ARMS)

The short lifting arm has 3 stages, providing a large adjustable range and therefore enables to lift small and wide vehicles.

**MM (MINI-MAX LIFTING ARMS)** Adapter for deep drawn side skirt and off-road vehicles. Quick vertical multilevel adjustment, hand and foot operated.

- For SMART LIFT 3,5 tons only


**SPORT CAR ARMS (SC)** Extremely flat and sturdy arms made of solid material enable the lifting of very low and wide sports cars.

- For SMART LIFT 4 tons

**UNIVERSAL CARRYING ARMS** Extended 3 stage lifting arms for lifting cars and vans up to Mercedes Sprinter with long wheelbase on alternative pick up points.

## THE SMART CHOICE

- Flexible: No ground connection between columns and adjustable height of top connection
- Suitable for a large range of vehicles
- Distance between the columns of 2460 mm
- Pick-up points starting at 75 mm\*
- Short lifting arms swivelling 180°

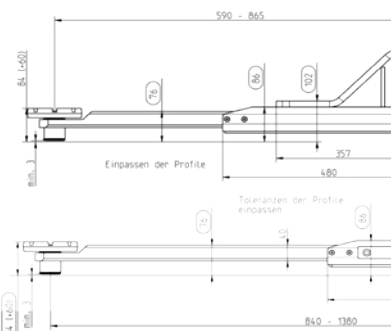

ar arms): extremely flat construction. Very sturdy,  
d material. Especially suitable for very low and  
ars.



## MAKE YOUR SMART CHOICE

SMART LIFT	2.30 SL	2.35 SL	2.40 SL
<b>Lifting capacity (kg)</b>	<b>3000</b>	<b>3500</b>	<b>4000</b>
<b>Lifting/lowering time approx. (sec)</b>	<b>40/40</b>	<b>46/40</b>	<b>46/40</b>
<b>Lifting height (mm)</b>	<b>2010</b>	<b>2060</b>	<b>2060</b>
<b>Lowest lifting point (mm)</b> Version DT	<b>95-140</b>	<b>115-190</b>	-
Version MINI-MAX	75-185	75-185	75-185
Version SC	-	80-120	-
Version UNIVERSAL	-	-	115-190
<b>Total height column (mm)</b>	<b>2890</b>	<b>2890</b>	<b>2890</b>
<b>Top connection (mm)</b>	<b>3720-4120</b>	<b>3685-4170</b>	<b>3685-4170</b>
<b>Total width (mm)</b> Version DT	<b>3100</b>	<b>3230</b>	-
Version MINI-MAX	3300	3350	3350
Version SC	-	3350	-
Version UNIVERSAL	-	-	3350
<b>Drive-through width (mm)</b> Version DT	<b>2314</b>	<b>2400</b>	-
Version MINI-MAX	2514	2520	2514
Version SC	-	2520	-
Version UNIVERSAL	-	-	2514
<b>Column distance (mm)</b> Version DT	<b>2560</b>	<b>2650</b>	-
Version MINI-MAX	2760	2770	2770
Version SC	-	2770	-
Version UNIVERSAL	-	-	2770
<b>Arm-extraction long (mm)</b> Version DT	<b>945-1495</b>	<b>940-1495</b>	-
Version MINI-MAX	1000-1480	1000-1480	1130-1840
Version SC	-	840-1380	-
Version UNIVERSAL	-	-	1130-1840
<b>Arm-extraction short (mm)</b> Version DT	<b>480-870</b>	<b>570-1160</b>	-
Version MINI-MAX	600-980	600-1000	635-1065
Version SC	-	590-865	-
Version UNIVERSAL	-	-	570-1160
<b>Motor (kW)</b>	<b>2 x 1,5</b>	<b>2 x 1,5</b>	<b>2 x 1,5</b>

### ACCESSORIES



Height adapter 44 mm



Height adapter 155-245 mm



U-form adapter 150-233 mm



Lashing straps (2 units)



Drive-on tables (4 units)

**More accessories available**