


Sololift 1.35 Fv Uni Ø 213

Electro-hydraulic single-ram lift, 3.5 t capacity, superstructure with lifting blades

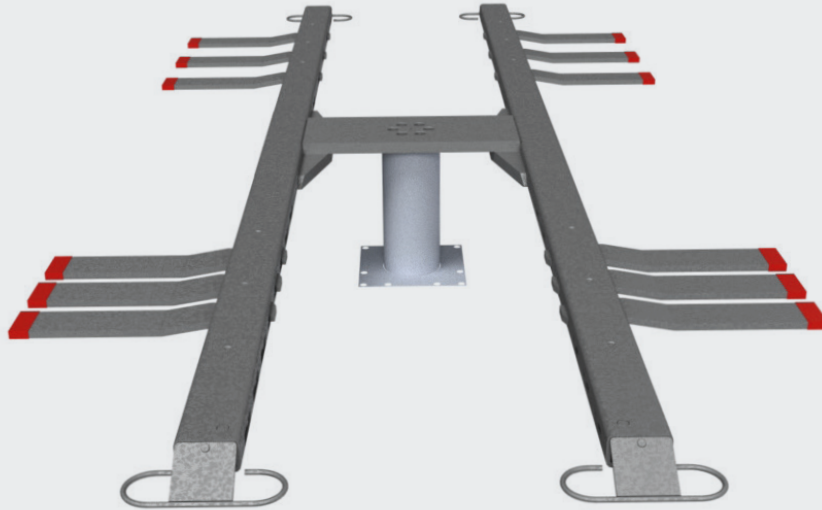

Application

- Check-in
- Wash
- Repairs and maintenance

Description:

Steel cassette:

- Waterproof steel cassette
- Self-carrying

Hydraulic unit:

- Hard-chrome plated cylinder
- High stability (Cyl. Ø213mm)
- Integrated anti-rotation device
- Corrosion-free guiding element
- Pump unit with immersed motor for fitting on wall
- Hydraulic oil
- Pneumatic emergency lowering
- Programmable pushbutton control unit
- Alarm signal / CE-stop

Superstructure:

- Superstructure with lifting blades on floor
- Adaptation to various wheel bases
by re-positioning of lifting blades
- Low minimum height

Standard surface-treatment:

- Hot galvanized

Versions:

Steel cassette:

- Hot galvanized
- Coated

Installation:

- Superstructure on floor
- Ceiling installation
- Hydraulic pump unit in floor
- Hydraulic pump unit on wall

Optional extras:

- Extra lifting blades

Zinc coating on request!



Scan the QR-Code for detailed product information.

Further Information on www.autopstenhoj.com

autop Maschinenbau GmbH



Sandkampstraße 90
DE- 48432 Rheine
☎ +49 5971 8602-02
☎ +49 5971 8602-25
✉ info@autopstenhoj.com

STENHØJ A/S

Barrit Langgade 188-190
DK-7150 Barrit
☎ +45 76 82 13 30
☎ +45 76 82 13 31
✉ info@autopstenhoj.com

Technical data	
Lifting capacity	3,500 kg
Lifting height	1,910 mm
Working height	1,930 mm
Cylinder diameter	213 mm
Lifting / lowering time (high pressure)	approx. 30 sec.
Foundation depth	2,650 mm
Motor	3 kW
Hydraulic oil	14 l
Voltage	230 / 400 V – 50 Hz –16 A

Fv Uni Superstructure	
Total length	4,658 mm
Wheel base, min. - max.	1,600 – 3,900 mm
Total width	1,050 / 2,106 mm
Min. height	20/80 mm

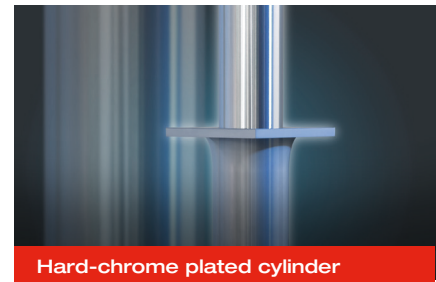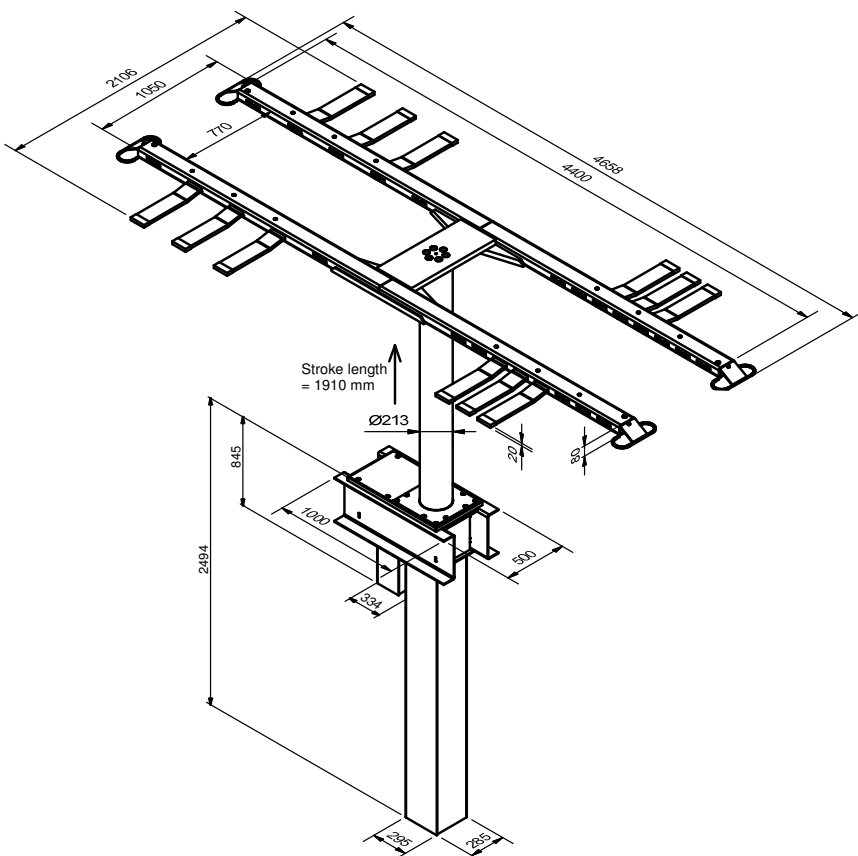

Hard-chrome plated cylinder



Cover



Fitting of lifting blades