

VAS 6560 Tire Changer

Professional tilt-column tire changer




*TCX54VAGE shown with
optional right-side press system*

Specifications

Electrical	230V, 1ph, 50/60Hz
Wheel clamping	
External (min-max)	12 - 24 in.
Internal (min-max)	14 - 27 in.
Maximum tire diameter	1100 mm
Maximum rim width	14 in.
Bead loosener width	390 mm
Table rotation speed	7 and 16 rpm clockwise 7 counter-clockwise
Noise level	<70 dB(A)
Operation pressure	8 - 10 bar
Machine weight	275 kg
Dimensions	
Height	1960 mm
Width	1340 mm
Depth	2000 mm

Some dimensions, capacities and specifications may vary depending on tire and wheel configurations.

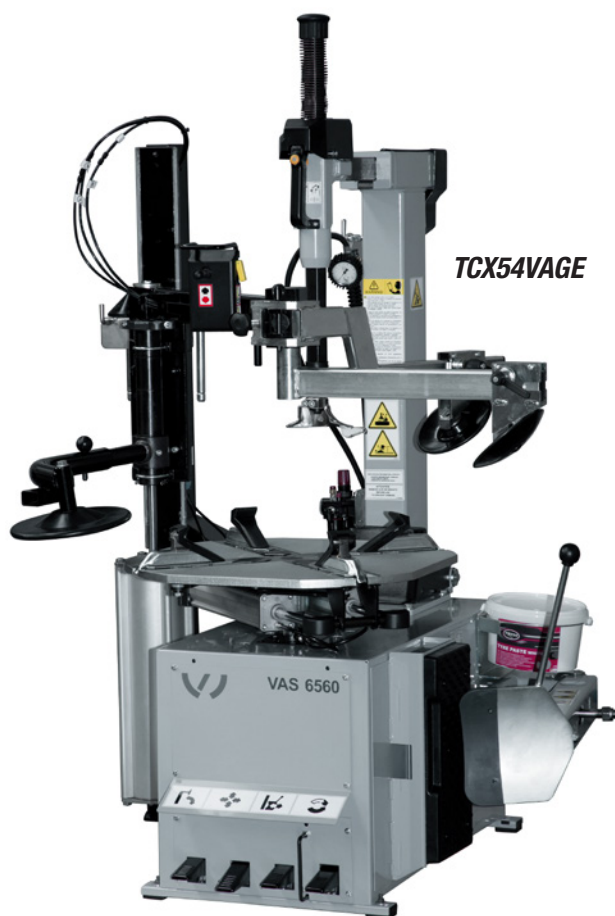

Because of continuing technological advancements, specifications, models and options are subject to change without notice.

1217BH

Copyright © 2017, Hunter Engineering Company

Model

TCX54VAGE TCX54 230V, 1ph, 50/60Hz

Standard equipment

- ✓ BPS30 with fixed BPT
- ✓ Tire bead lever
- ✓ Tire bead lever protectors (2)
- ✓ Spare mounthead protectors (5)
- ✓ Inflation hose and gauge
- ✓ Mounting paste and brush
- ✓ Jaw Protectors (4)
- ✓ Side Shovel Protectors (5)
- ✓ WDK spacer

Optional equipment

- RP11-8-11400149** Wheel lift
- RP11-8-11400197** Quick exchange mount head device
- RP11-8-11100402** Jaw extender/reducer
Extends range to 30 in. (+ 4 in.) or
reduces range to 6 in. (- 4 in.)
- RP11-5-490223** Set of 4 shovel protectors
- RP11-8-11400098** Set of 4 bead lever protectors
- RP11-8-11100358** Set of 8 hi-grip jaw protectors
- RP11-8-11400085** Set of 8 standard jaw protectors
- RP11-2200277** Set of standard motorcycle adaptors

HUNTER
Engineering Company

www.hunter.com

11250 Hunter Drive, Bridgeton, MO 63044, USA
Tel: 1-314-731-3020, Fax: 1-314-731-0132
Email: international@hunter.com

Form 6711-TE-05, 12/17
Supersedes form 6711-TE-05, 12/13