


Betonqualität  
quality of concrete  
min.C20/25  
normal bewehrt  
normal armoring

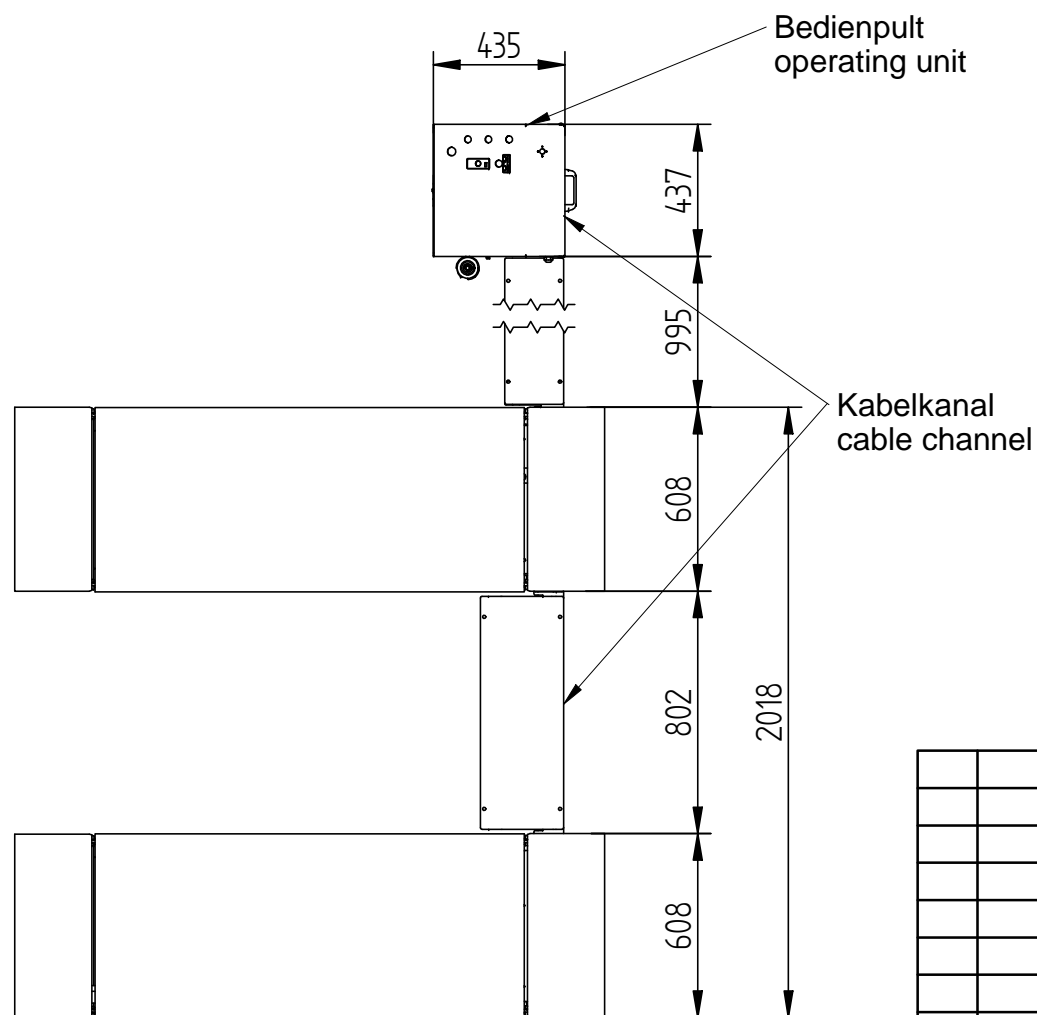

Bauseits am Bedienpult bereitstellen:  
Netzanschluss: 3PH+PE,400V,50Hz  
Motorleistung: 2,6 kW  
Absicherung: 10 Ampere träge  
Kabellänge: ca.2m, 4 x 4mm<sup>2</sup>

Prepared by customer at the main operating unit:  
power supply: 3PH+PE,400V,50Hz  
Motor power 2,6 kW  
fuse: 10 Ampere, time lag  
cable diameter: 4 x 4mm<sup>2</sup>  
cable length: approx.2m

Wir weisen in unseren Plänen auf die Mindestanforderung des Fundamentes hin, jedoch der Zustand der örtlichen Gegebenheiten (z.B. Untergrund, Ausführung etc.) obliegt nicht unserer Verantwortung. Die Ausbildung der Einbausituation muss vom planenden Architekten bzw. Statiker im speziellen Fall individuell spezifiziert werden.

We point out the minimum requirement of the foundation in our plans. The condition of the local realities for example: the ground under the foundation) does not lie in our responsibility. The execution of the installation situation must be individually specified by the planning architect or by the engineer engaged in statically calculations in the special case.

Alle Maße in Millimeter  
all dimensions in millimeter

Maß- und Konstruktionsänderungen vorbehalten!  
subject to alterations!

				THIRD ANGLE PROJECTION	DF35CAT Data sheet
				DO NOT SCALE DRAWING	
				UNLESS OTHERWISE NOTED: ANGULAR DIMENSIONS: +/- 1 OTHER DIMENSIONS: +/- 0.8mm (< 305mm) +/-1.6mm (> or= 305mm)	VSG
				NOTES: Tragfähigkeit/capacity: 3500 kg	
				The design and detail illustrated in this drawing is the property of Vehicle Service Group. It is being loaned with the expressed condition that it will not be duplicated or used except by permission and is subject to return upon request.	DRAWN MD. DATE 08.07.2021 SHEET DRAWING NUMBER
				REV CO NUM DATE BY	APPROVED DF35CAT_(057907970)