



# AIR HYDRAULIC JACKS

## B25-2



Capacity: 25 / 10 t  
Max. height: 235 / 320 mm

### Portable air hydraulic jack – ideal for service vans etc.

Low minimum height of only 160 mm and low weight of only 28 kg

Handy design - no loose tubes, handles or valves

Easy to operate – handle can be used for carrying, lifting, lowering and manoeuvring

Hard chromium plated piston rod for long life

Built-in safety overload valve

Hand-operated dead-man's control for optimum safety whilst lifting and lowering


Transport locking device / wall bracket for both van and workshop (Option)

With 2 extensions (50/100 mm)



## B25-2

Capacity	25 / 10 t
Min. height	160 mm
Max. height	235 / 320 mm
Frame length	535 mm
Handle length	550 mm
Width	225 mm
Width (with wheels)	290 mm
Air supply	9 - 12 bar
Air consumption	350 l/min
Weight	28 kg

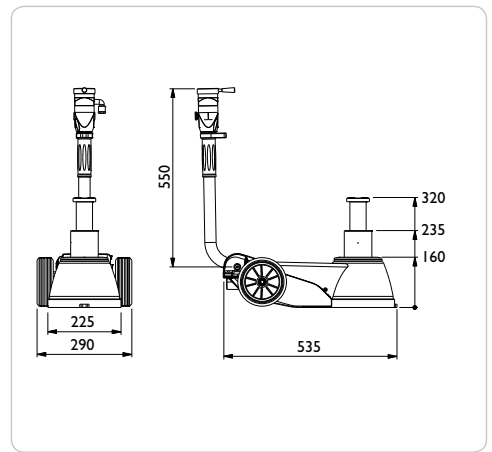



# AIR HYDRAULIC JACKS


## 25-I



Capacity: 25 t  
Max. height: 345 mm

### Single stage air hydraulic jack for heavy plant machinery and trucks

- Minimum height of 220 mm
- Designed for heavy-duty, intensive commercial use
- Hard chromium plated piston rod for long life
- Built-in safety overload valve
- Hand-operated dead-man's control for optimum safety whilst lifting and lowering
- Ergonomic handle with push buttons
- With 2 extensions (50/100 mm)

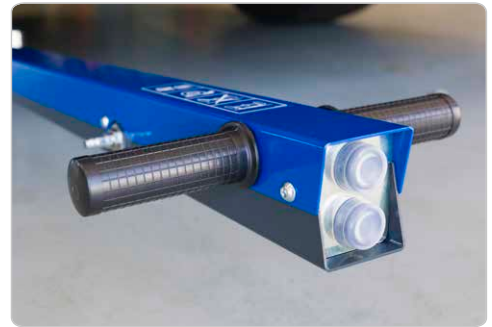

## 25-IH




Capacity: 25 t  
Max. height: 610 mm

### Single stage air hydraulic jack for agricultural and contractors' machinery, trailers and other high clearance applications

- Minimum height of 360 mm
- Maximum height of 610 mm, the F250 (optional) extension offers a total extended height of 860 mm
- Hard chromium plated piston rod for long life
- Built-in safety overload valve
- Hand-operated dead-man's control for optimum safety whilst lifting and lowering
- Ergonomic handle with push buttons
- With 2 extensions (50/100 mm)



	25-I	25-IH
Capacity	25 t	25 t
Min. height	220 mm	360 mm
Max. height	345 mm	610 mm
Frame length	770 mm	820 mm
Handle length	1160 mm	1160 mm
Width	160 mm	230 mm
Width (with wheels)	305 mm	310 mm
Air supply	9 - 10 bar	9 - 10 bar
Air consumption	350 l/min	350 l/min
Weight	62 kg	71 kg

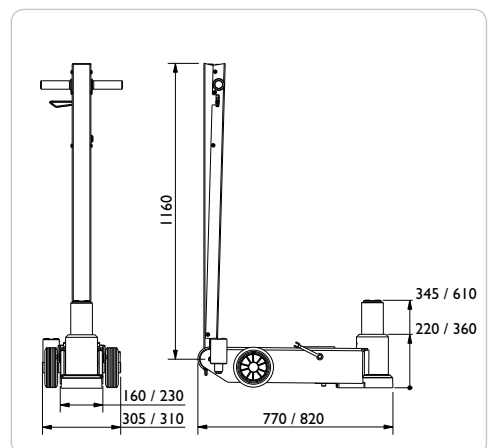



# AIR HYDRAULIC JACKS

**25-2**



Capacity: 25 / 10 t  
Max. height: 275 / 380 mm

## Versatile 2-stage air hydraulic jack for buses and trucks

- Minimum height of 180 mm
- Designed for heavy-duty, intensive commercial use
- Hard chromium plated piston rod for long life
- Built-in safety overload valve
- Hand-operated dead-man's control for optimum safety whilst lifting and lowering
- Ergonomic handle with push buttons
- With 2 extensions (50/100 mm)



**50-2**




Capacity: 50 / 25 t  
Max. height: 340 / 450 mm

## 2-stage air hydraulic jack for heavy buses and trucks

- Minimum height of 220 mm
- Designed for heavy-duty, intensive commercial use
- Hard chromium plated piston rod for long life
- Built-in safety overload valve
- Hand-operated dead-man's control for optimum safety whilst lifting and lowering
- Ergonomic handle with push buttons
- With 2 extensions (50/100 mm)



	25-2	50-2
Capacity	25 / 10 t	50 / 25 t
Min. height	180 mm	220 mm
Max. height	275 / 380 mm	340 / 450 mm
Frame length	770 mm	810 mm
Handle length	1160 mm	1160 mm
Width	160 mm	200 mm
Width (with wheels)	305 mm	315 mm
Air supply	9 - 10 bar	9 - 10 bar
Air consumption	350 l/min	350 l/min
Weight	60 kg	80 kg

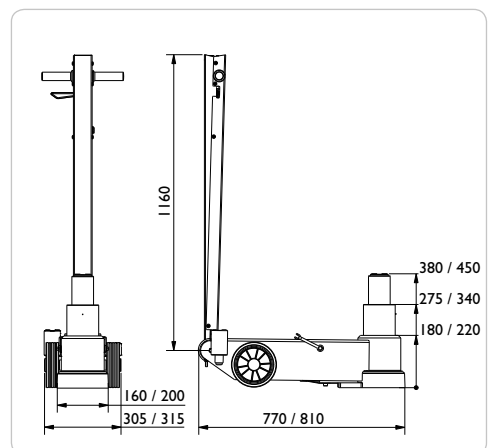



# AIR HYDRAULIC JACKS

## 50-3



Capacity: 50 / 25 / 10 t  
Max. height: 210 / 265 / 335 mm

### 3-stage air hydraulic jack for low buses and other low clearance vehicles

Minimum height of only 150 mm combined with a high lifting capacity

Telescopic cylinders ensure an excellent maximum lift together with a low closed height

Designed for heavy-duty, intensive commercial use

Built-in safety overload valve

Hand-operated dead-man's control for optimum safety whilst lifting and lowering

Ergonomic handle with push buttons

With 2 extensions (50/100 mm)



## 50-3H



Capacity: 50 / 25 / 10 t  
Max. height: 340 / 450 / 560 mm

### 3-stage air hydraulic jack for high clearance vehicles

Minimum height of 220 mm and high maximum height of 560 mm

Designed for heavy-duty, intensive commercial use

Hard chromium plated piston rod for long life

Built-in safety overload valve


Hand-operated dead-man's control for optimum safety by lifting and lowering

Ergonomic handle with push buttons



*For safety reasons extensions are not included*

	50-3	50-3H
Capacity	50 / 25 / 10 t	50 / 25 / 10 t
Min. height	150 mm	220 mm
Max. height	210 / 265 / 335 mm	340 / 450 / 560 mm
Frame length	810 mm	810 mm
Handle length	1160 mm	1160 mm
Width	200 mm	200 mm
Width (with wheels)	310 mm	310 mm
Air supply	9 - 10 bar	9 - 10 bar
Air consumption	350 l/min	350 l/min
Weight	67 kg	77 kg

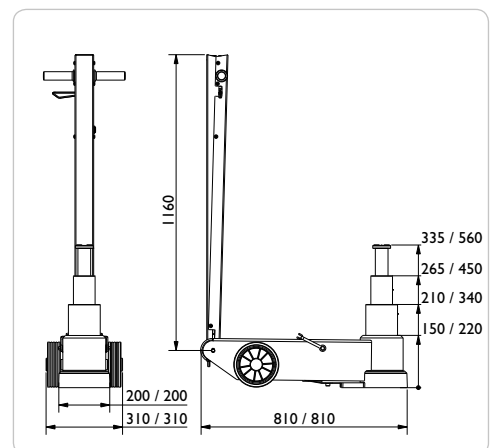



# AIR HYDRAULIC JACKS

**40-4**



Capacity: 40 / 27 / 16 / 10 t  
Max. height: 145 / 180 / 230 / 275 mm

## 4-stage air hydraulic jack for low buses and other low clearance vehicles

The lowest jack on the market with a minimum height of only 100 mm



Telescopic cylinders ensure a fast and safe 4-stage lift

Compact and short chassis for even the lowest vehicles


Hand-operated dead-man's control for optimum safety whilst lifting and lowering

Ergonomic handle with push buttons

With 2 extension (50/100 mm)

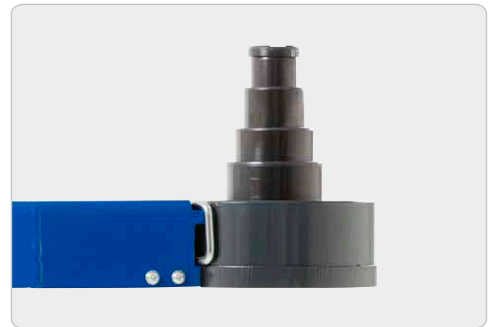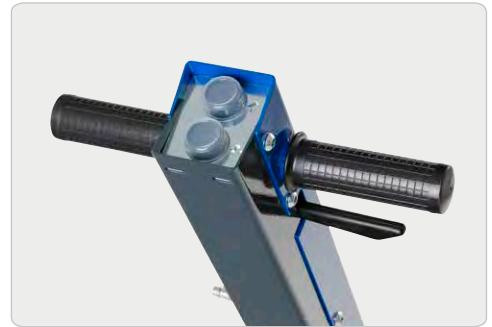

40-4	
Capacity	40 / 27 / 16 / 10 t
Min. height	100 mm
Max. height	145 / 180 / 230 / 275 mm
Frame length	630 mm
Handle length	1160 mm
Width	235 mm
Width (with wheels)	255 mm
Air supply	6 - 10 bar
Air consumption	215 l/min
Weight	54 kg

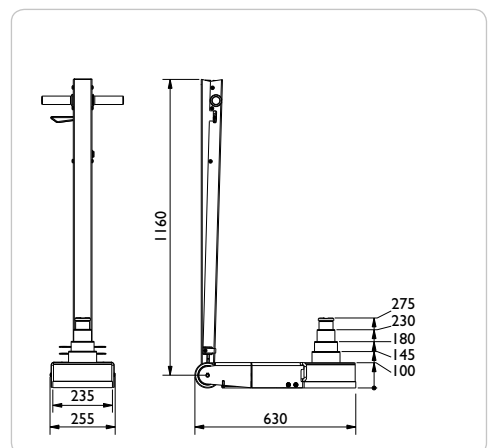



# AIR HYDRAULIC JACKS

## 65-I



Capacity: 65 t  
Max. height: 380 mm

### Air hydraulic jack for heavy contractors' machinery

Minimum height of 245 mm with an extremely high capacity of 65 t

Designed for heavy-duty, intensive commercial use

Hard chromium plated piston rod for long life

Built-in safety overload valve

Hand-operated dead-man's control for optimum safety whilst lifting and lowering

Ergonomic handle with push buttons

Supplied with 2 extensions (100/200 mm) and pneumatic tyres



## 65-IH



Capacity: 65 t  
Max. height: 725 mm

### Air hydraulic jack for heavy duty applications with high clearance

Minimum height of 425 mm

Maximum height of 725 mm and with extensions up to 1025 mm

Designed for heavy-duty, intensive commercial use


Hard chromium plated piston rod for long life

Built-in safety overload valve


Hand-operated dead-man's control for optimum safety whilst lifting and lowering

Ergonomic handle with push buttons

With 2 extensions (100/200 mm)

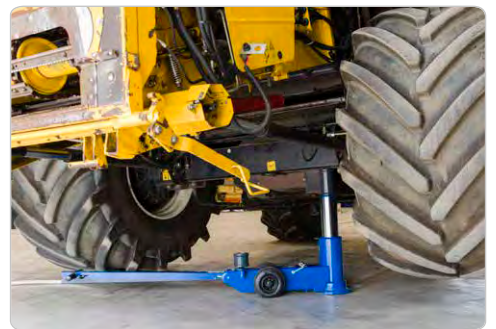


	65-I	65-IH
Capacity	65 t	65 t
Min. height	245 mm	425 mm
Max. height	380 mm	725 mm
Frame length	825 mm	980 mm
Handle length	1160 mm	1160 mm
Width	200 mm	300 mm
Width (with wheels)	380 mm	380 mm
Air supply	9 - 10 bar	9 - 10 bar
Air consumption	350 l/min	350 l/min
Weight	95 kg	138 kg

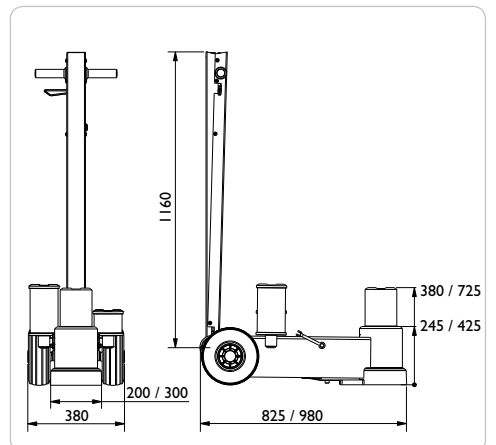



## OPTION - AIR HYDRAULIC JACKS

### SBB

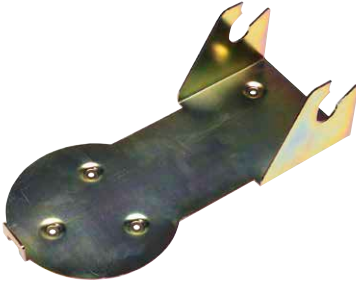

#### Transport locking device and wall bracket for B25-2

Safe storage in service vans. Prevents damages in cases of emergency stops. Neat and practical wall mounting in the workshop.

Fits:  
B25-2



### F250



#### Extension

Increase the maximum height by 250 mm

*Cannot be used together with other extensions*

Fits:  
B25-2  
25-1  
25-1H  
25-2  
50-2  
50-3



### FW



Capacity: 10 t

#### Jack saddle

Ø 145 mm

Suitable for lifting under bolts, differential gear etc.

Fits:  
B25-2  
25-1  
25-1H  
25-2  
40-4  
50-2  
50-3



### FWI



Capacity: 10 t

#### V-saddle

For lifting under different types of axles

Fits:  
B25-2  
25-1  
25-1H  
25-2  
40-4  
50-2  
50-3

