



Betonqualität
quality of concrete
min.C20/25
normal bewehrt
normal armouing

Wir weisen in unseren Plänen auf die Mindestanforderung des Fundamentes hin, jedoch der Zustand der örtlichen Gegebenheiten (z.B. Untergrund, Ausführung etc.) obliegt nicht unserer Verantwortung. Die Ausbildung der Einbausituation muss vom planenden Architekten bzw. Statiker im speziellen Fall individuell spezifiziert werden.

We point out the minimum requirement of the foundation in our plans. The condition of the local realities for example: the ground under the foundation) does not lie in our responsibility. The execution of the installation situation must be individually specified by the planning architect or by the engineer engaged in statically calculations in the special case.

Bauseits am Bedienpult bereitstellen:
Motorleistung: 2,6 kW
Netzanschluss: 3PH+PE,400V 50Hz ,fuse: 10 Ampere
230V 50Hz ,fuse: 17 Ampere
Absicherung: 10 Ampere träge
Kabellänge: ca.2m, 4 x 4mm²

Prepared by customer at the main operating unit:
Motor power 2,6 kW
power supply: 3PH+PE,400V 50Hz ,fuse: 10 Ampere
230V 50Hz ,fuse: 17 Ampere
cable diameter: 4 x 4mm²,cable length:approx.2m

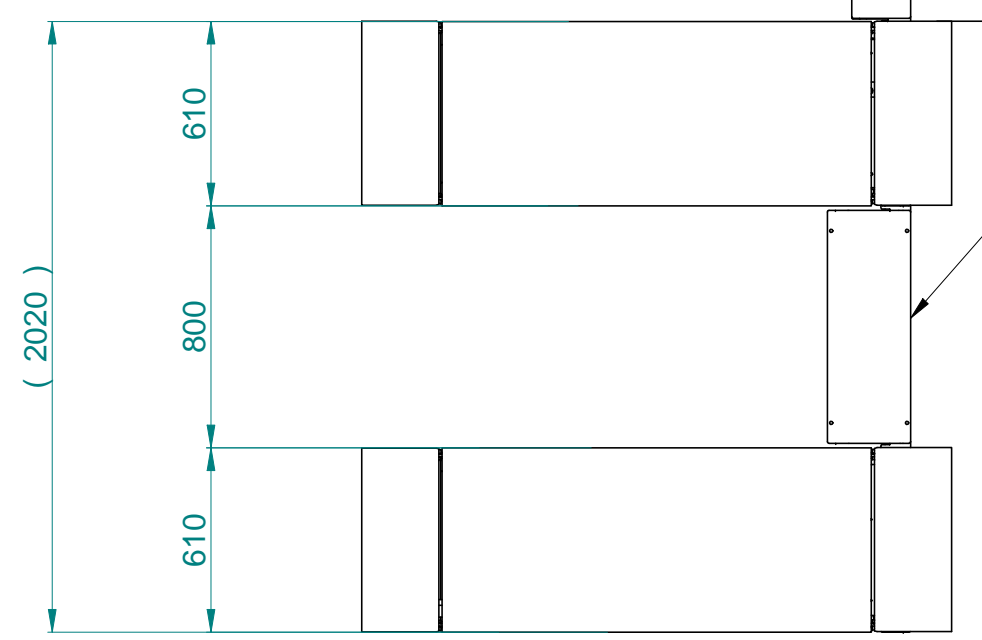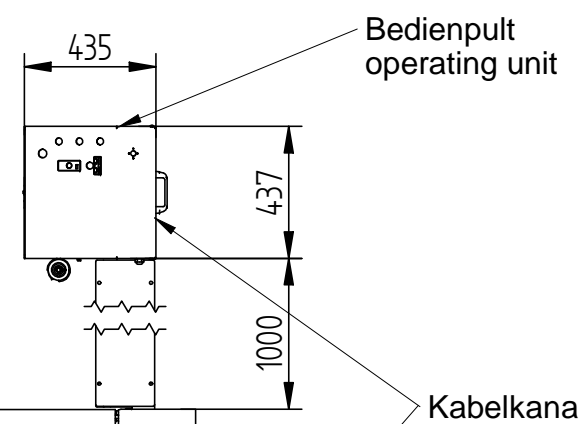

Alle Maße in Millimeter
all dimensions in millimeter
Maß- und Konstruktionsänderungen vorbehalten!
subject to alterations!

				THIRD ANGLE PROJECTION		DF30CAT Data sheet	
				DO NOT SCALE DRAWING			
				UNLESS OTHERWISE NOTED: ANGULAR DIMENSIONS: +/- 1 OTHER DIMENSIONS: +/- 0.8mm (< 305mm) +/-1.6mm (> or= 305mm)		UNLESS OTHERWISE SPECIFIED: 0.8mm MIN. CORNER BREAK REMOVE ALL BURRS	
				NOTES: Tragfähigkeit/capacity: 3000 kg			
				The design and detail illustrated in this drawing is the property of Vehicle Service Group.It is being loaned with the expressed condition that it will not be duplicated or used except by permission and is subject to return upon request.			
REV	CO NUM	DATE	BY	DRAWN CS.		DATE 01.12.2022	SHEET
				APPROVED		DRAWING NUMBER DF30CAT_(057907990)	